

Explosion-Protected Thermometer Indicating Switch

Model No. **KTD-21 Series**

DAEJIN



KTD-21

[Explosion-Protected of Protection] Ex d IIC T4

Summary

As the driving power is strong, the indicator indicates certainly and it is widely used for industrial use because its transmission speed of temperature is very fast.

This instrument has a micro switch which produces a contact signal when there is an increase or decrease of temperature by controlling the setting temperature outside.

Safety Management

- Install a thermowell when there exist high voltage, slurry or when measuring the temperature of fluid with high corrosiveness.
- Do not give impact during transportation, installation and usage.
- Be sure to install the thermometer to be horizontal and vertical.
- Avoid the place where exist a lot of vibration.
- Do not use over the switch capacity (Under AC220V 5A)
- Use the interior and exterior of earth terminal.

Purpose of Use

- Indication, warning and controlling of the usage of pipe in the region of explosion.
- Indication, warning and controlling of the temperature at LNG, LPG plant
- Indication, warning and controlling of the explosive chemical plant.
- Instructing, warning, controlling, etc. of the temperature of pressure vessel

Production Specification

- ▶ Accuracy
 - $\pm 2.0\%$ of Full Scale
- ▶ Dead Band : $\pm 4\%$
- ▶ Repeatability : $\pm 1\%$
- ▶ Scale Range
 - $-30^{\circ}\text{C} \sim 650^{\circ}\text{C}$
- ▶ Common Temperature
 - 75% of Full Scale
- ▶ Explosion-Protected of Protection
 - Ex d IIC T4

Product Specification

<p>+ Case</p> <ul style="list-style-type: none"> · Aluminum(Hammer tone coating) · Explosion-protected type(Ex d IIC T4) 	<p>+ Stem</p> <ul style="list-style-type: none"> · STS 304, STS 316 · Out Dia. : $\varnothing 8, \varnothing 10, \varnothing 12\text{mm}$ 	<p>+ Bourdon Tube</p> <ul style="list-style-type: none"> · STS 316
<p>+ Cover</p> <ul style="list-style-type: none"> · Aluminum(Hammer tone coating) 	<p>+ Dial</p> <ul style="list-style-type: none"> · Aluminum · Color of white · Black gradation and characters 	<p>+ Contact rating</p> <ul style="list-style-type: none"> · AC 125V 5A / 250V 3A · DC 30V 4A / 125V 0.4A / 250V 0.2A
<p>+ Connection</p> <ul style="list-style-type: none"> · STS 304 · PF, PT, NPT \leftrightarrow 1/2(Standard) 	<p>+ Pointer</p> <ul style="list-style-type: none"> · Aluminum · Black coating 	<p>+ Contact Form</p> <ul style="list-style-type: none"> · Micro Contact Type SPDT * 1, SPDT * 2, DPDT * 1 (High, Low, High & High High & Low, Low & Low)
<p>+ Window</p> <ul style="list-style-type: none"> · Tempered safety glass · Laminated safety glass 	<p>+ Well</p> <ul style="list-style-type: none"> · STS 304, 316 · Titanium, Monel, Hastelloy Teflon Lining, Glass Lining 가능 	<p>+ Option</p> <ul style="list-style-type: none"> · Cable Grand

Pressure Gauge

Differential Pressure Gauge & Switch

Accessories of Pressure Gauge

Thermometer & Thermometer Switch

Thermocouple & R.T.D



Thermowell

Transmitter

Indicator etc.

Technical data

Model No. | KTD-21

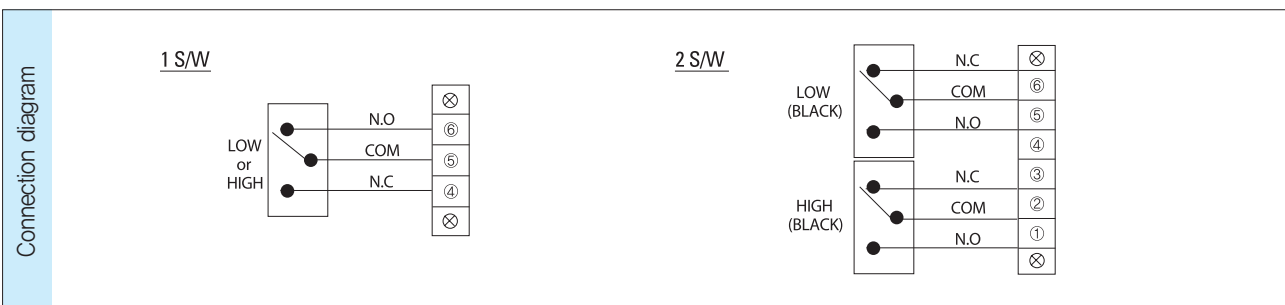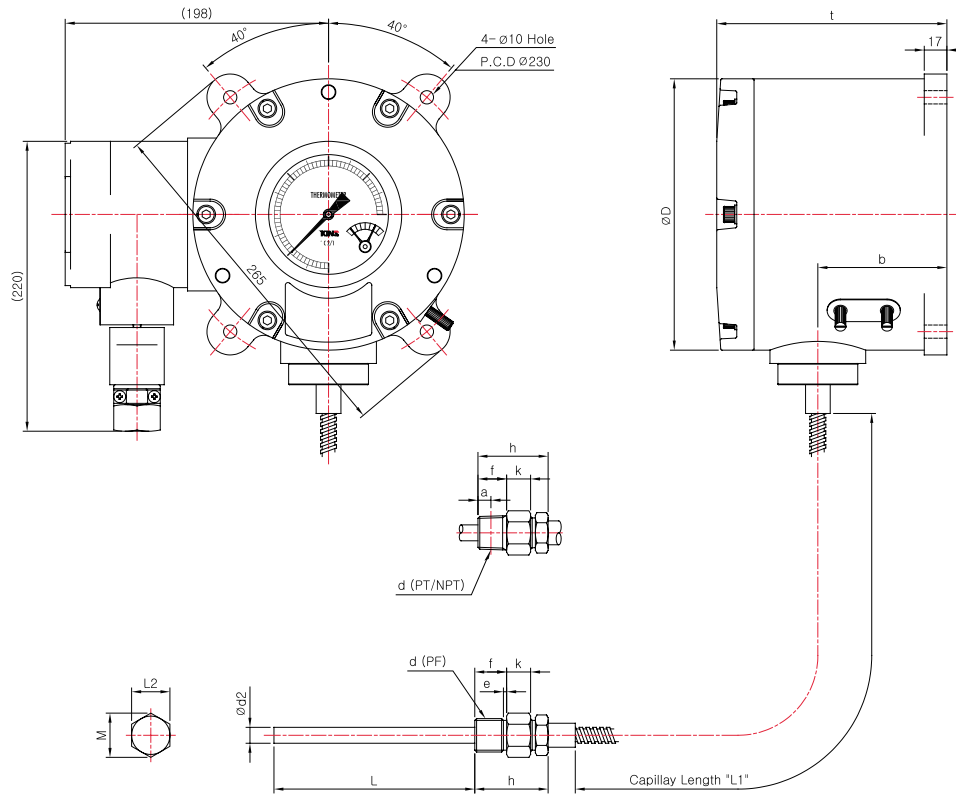

Dimensions (mm)

Model No.	Conn'n (d)	ØD	b	t	L2	M	k	Ød2	h	f	e	a
KTD-21	PF 1/2	204	97	(170)	24	(27.7)	17	8	(50)	20	2	-
	NPT & PT 1/2							12	(48)	18	-	8.16

*()The measurement in the blanket is approximate.

Pressure Gauge

Differential Pressure Gauge & Switch

Accessories of Pressure Gauge

Thermometer & Thermometer Switch

Thermocouple & R.T.D

Thermowell

Transmitter

Indicator etc.

Technical data